


## Technical Data sheet concrete surface spacer Zick Zack in quality level Q1

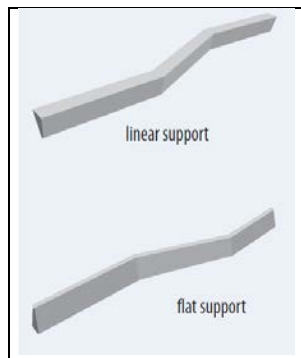

| Article Nr.        | Height mm | Palette Pieces | Palette kg |
|--------------------|-----------|----------------|------------|
| 7000/20/800/BD/Q1  | 20        | 1500           | 997        |
| 7001/25/800/BD/Q1  | 25        | 1200           | 997        |
| 7002/30/800/BD/Q1  | 30        | 750            | 925        |
| 7003/35/800/BD/Q1  | 35        | 600            | 859        |
| 7004/40/800/BD/Q1  | 40        | 500            | 839        |
| 7005/45/800/BD/Q1  | 45        | 500            | 1000       |
| 7006/50/800/BD/Q1  | 50        | 400            | 886        |
| 7007/55/800/BD/Q1  | 55        | 400            | 977        |
| 7008/60/800/BD/Q1  | 60        | 320            | 995        |
| 7009/65/800/BD/Q1  | 65        | 280            | 924        |
| 7010/70/800/BD/Q1  | 70        | 250            | 870        |
| 7011/75/800/BD/Q1  | 75        | 225            | 900        |
| 7012/80/800/BD/Q1  | 80        | 200            | 900        |
| 7013/85/800/BD/Q1  | 85        | 200            | 905        |
| 7014/90/800/BD/Q1  | 90        | 150            | 850        |
| 7016/100/800/BD/Q1 | 100       | 120            | 900        |

**Description:** Concrete trapezium shaped surface spacer, app. Length 800 mm, galvanized reinforcing wire, could be used on both sides, round linear support surface for exposed concrete requirements, wide flat support surface for soft shuttering backing surfaces, e.g. insulation, very stable for high load assumption

**Cover:** 20 - 100 mm

**Performance Class:** C50 / 60 = B 50

**Compressive Strength:** >50 N / mm<sup>2</sup> (50 MPA) after 28 days, cube 150mm

**Material Composition:** Sand 0-2, Cement CEMI, Plasticizer, w/c < 0,38

Test Certificate Nr. 220011095-15-01; Material Testing Institute MPA Nordrhein – Westfalen, Germany

- Tested on frost thaw resistance on the embedded spacer (CF Method)
- Tested on water penetration depth on the embed spacer
- Tested on thermal cycling

Spacers from BAG® Bauartikel GmbH are full filling the restriction F/T/A according to DBV leaflet „ Spacers according to Eurocode 2, Edition January 2011“

F = XF1, XF2, XF3 und XF4      T = XS1, XS2, XS3      A= XD1-XD3, XS1-XS3, XF2 and XF4, XA1-XA2.

We have to advice that the right use of our products has to be checked by the operator before every installing situation.

All test certificates are available on request.

Sprendlingen, den 2016-10-12

[www.bag-bauartikel.de](http://www.bag-bauartikel.de)  
[zentrale@bagbauartikel.com](mailto:zentrale@bagbauartikel.com)

phone: +49 6701 93310  
 fax: +49 6701 933115